



B **TALI**®

ALL PRODUCTS
RANGE

The logo features a stylized black letter 'B' followed by the word 'TALI' in a bold, italicized orange font. A registered trademark symbol (®) is located at the top right of the 'I'. To the left of the text is a graphic element consisting of a black triangle and a grey parallelogram, both slanted upwards from left to right.

B TALI®

MACHINERIES



BTALI®

HIGH PRESSURE WASHER BT 1000 HPW

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER-1600WATT
WORKING PRESSURE-100BAR
MAXIMUM PRESSURE-130 BAR
FLOW-10LPM
WEIGHT-8KG

FEATURES

SELF SUCTION
INDUCTION MOTOR TYPE
AUTO STOP
COMPACT DESIGN
ADJUSTABLE PRESSURE GUN
PORTABLE HANDLING
EASY REPAIRABLE



EASY
TRANSPORT



GUARANTEED
QUALITY



1600W POWER	HIGH PRESSURE WASHER PRO LINE	130BAR MAX PRESSURE
-----------------------	---	-------------------------------

ISO 9001:2015

CERTIFIED COMPANY



BTALI®

HIGH PRESSURE WASHER BT 1000-C HPW CLASSIC SERIES

VOLTAGE / FREQUENCY 220V/50HZ

Specifications

POWER : 2000 WATTS
MAXIMUM PRESSURE : 210 BAR
FLOW : 8 LPM
WEIGHT : 11 KG

FEATURES

SELF SUCTION
INDUCTION MOTOR TYPE
AUTO STOP
COMPACT DESIGN
ADJUSTABLE PRESSURE GUN
PORTABLE HANDLING
EASY REPAIRABLE



EASY
TRANSPORT



GUARANTEED
QUALITY



2000W HIGH PRESSURE WASHER
POWER PRO LINE **210 BAR**
MAX PRESSURE

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

HIGH PRESSURE WASHER BT 1000-D HPW DELUXE SERIES

VOLTAGE / FREQUENCY 220V/50HZ

Specifications

POWER : 2100 WATTS
MAXIMUM PRESSURE : 220 BAR
FLOW : 9 LPM
WEIGHT : 11 KG

FEATURES

SELF SUCTION
INDUCTION MOTOR TYPE
AUTO STOP
COMPACT DESIGN
ADJUSTABLE PRESSURE GUN
PORTABLE HANDLING
EASY REPAIRABLE



EASY
TRANSPORT



GUARANTEED
QUALITY



2100W HIGH PRESSURE WASHER
POWER PRO LINE **220 BAR**
MAX PRESSURE

ISO 9001:2015

CERTIFIED COMPANY



BTALI[®]

HIGH PRESSURE WASHER

BT 1000-D2 HPW

DYNAMIC SERIES

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 2000 WATTS
MAXIMUM PRESSURE : 210 BAR
FLOW : 8 LPM
WEIGHT : 11 KG

FEATURES

SELF SUCTION
INDUCTION MOTOR TYPE
AUTO STOP
COMPACT DESIGN
ADJUSTABLE PRESSURE GUN
PORTABLE HANDLING
EASY REPAIRABLE



EASY
TRANSPORT



GUARANTEED
QUALITY



2000W
POWER

HIGH PRESSURE WASHER
PRO LINE

210 BAR
MAX PRESSURE

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

HIGH PRESSURE WASHER BT 1000-E HPW ELEGANCE SERIES

VOLTAGE / FREQUENCY 220V/50HZ

Specifications

POWER : 2000 WATTS
MAXIMUM PRESSURE : 210 BAR
FLOW : 8 LPM
WEIGHT : 11 KG

FEATURES

SELF SUCTION
INDUCTION MOTOR TYPE
AUTO STOP
COMPACT DESIGN
ADJUSTABLE PRESSURE GUN
PORTABLE HANDLING
EASY REPAIRABLE



EASY
TRANSPORT



GUARANTEED
QUALITY



2000W HIGH PRESSURE WASHER
POWER PRO LINE **210 BAR**
MAX PRESSURE

ISO 9001:2015

CERTIFIED COMPANY



BTALI®

HIGH PRESSURE WASHER BT 1000-P HPW PROFESSIONAL SERIES

VOLTAGE / FREQUENCY 220V/50HZ

Specifications

POWER : 2100 WATTS
MAXIMUM PRESSURE : 220 BAR
FLOW : 9 LPM
WEIGHT : 11 KG

FEATURES

SELF SUCTION
INDUCTION MOTOR TYPE
AUTO STOP
COMPACT DESIGN
ADJUSTABLE PRESSURE GUN
PORTABLE HANDLING
EASY REPAIRABLE



EASY
TRANSPORT



GUARANTEED
QUALITY



2100W HIGH PRESSURE WASHER
POWER PRO LINE **220 BAAR**
MAX PRESSURE

ISO 9001:2015

CERTIFIED COMPANY



BTALI®

HIGH PRESSURE WASHER BT 1000-S HPW SMART SERIES

VOLTAGE / FREQUENCY 220V/50HZ

Specifications

POWER: 1900 WATTS
MAXIMUM PRESSURE : 130 BAR
FLOW: 10 LPM
WEIGHT: 8 KG

FEATURES

SELF SUCTION
INDUCTION MOTOR TYPE
AUTO STOP
COMPACT DESIGN
ADJUSTABLE PRESSURE GUN
PORTABLE HANDLING
EASY REPAIRABLE



EASY
TRANSPORT



GUARANTEED
QUALITY



1900W HIGH PRESSURE WASHER
POWER PRO LINE **130 BAR**
MAX PRESSURE

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

HIGH PRESSURE WASHER BT 1050 HPW

VOLTAGE / FREQUENCY 220V/50HZ

Specifications

POWER:2000 WATTS
MAXIMUM PRESSURE :210 BAR
FLOW:11 LPM
WEIGHT: 11.8 KG

FEATURES

100% COPPER WIRE
SELF SUCTION
INDUCTION MOTOR
AUTO STOP
COMPACT DESIGN
PORTABLE HANDLING
HEAVY SPARE PARTS



EASY
TRANSPORT



GUARANTEED
QUALITY



2000W POWER	HIGH PRESSURE WASHER	210 BAR MAX PRESSURE
PRO LINE		

ISO 9001:2015

CERTIFIED COMPANY



BTALI®

HIGH PRESSURE WASHER BT 1060 HPW

VOLTAGE / FREQUENCY 220V/50HZ

Specifications

POWER: 2200 WATTS
MAXIMUM PRESSURE : 220 BAR
FLOW: 13 LPM
WEIGHT: 11KG

FEATURES

100% COPPER WIRE
SELF SUCTION
INDUCTION MOTOR
AUTO STOP
COMPACT DESIGN
PORTABLE HANDLING
HEAVY SPARE PARTS



EASY
TRANSPORT



GUARANTEED
QUALITY



2200W POWER	HIGH PRESSURE WASHER PRO LINE	220 BAR MAX PRESSURE
-----------------------	--	--------------------------------

ISO 9001:2015

CERTIFIED COMPANY



BTALI®

HIGH PRESSURE WASHER BT 1090 HPW

VOLTAGE / FREQUENCY 220V/50HZ

Specifications

POWER: 2600 WATTS
MAXIMUM PRESSURE : 240 BAR
FLOW: 17 LPM
WEIGHT: 11KG

FEATURES

100% COPPER WIRE
SELF SUCTION
INDUCTION MOTOR
AUTO STOP
COMPACT DESIGN
PORTABLE HANDLING
HEAVY SPARE PARTS



EASY
TRANSPORT



GUARANTEED
QUALITY



2600W
POWER

HIGH PRESSURE WASHER
PRO LINE

240 BAR
MAX PRESSURE

ISO 9001:2015

CERTIFIED COMPANY



BTALI®

HIGH PRESSURE WASHER BT 1100 HPW

VOLTAGE / FREQUENCY 220V/50HZ

Specifications

POWER : 2200 WATTS
MAXIMUM PRESSURE : 220 BAR
FLOW : 15 LPM
WEIGHT : 14 KG

FEATURES

- 100% COPPER WIRE
- SELF SUCTION
- INDUCTION MOTOR TYPE
- COMPACT DESIGN
- PORTABLE HANDLING
- TROLLEY TYPE
- EASY REPAIRABLE



EASY
TRANSPORT



GUARANTEED
QUALITY



2200W POWER	HIGH PRESSURE WASHER PRO LINE	220BAR MAX PRESSURE
-----------------------	---	-------------------------------

ISO 9001:2015

CERTIFIED COMPANY



BTALI®

HIGH PRESSURE WASHER BT 1200 HPW

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 1800 WATTS
WORKING PRESSURE : 130 BAR
MAXIMUM PRESSURE : 150 BAR
FLOW : 12 LPM
WEIGHT : 16 KG

FEATURES

100% COPPER WIRE
SELF SUCTION
INDUCTION MOTOR TYPE
BRASS CHAMBER
AUTO STOP COMPACT DESIGN
HEAVY DUTY SPARE PARTS
PORTABLE HANDLING
TROLLEY TYPE
EASY REPAIRABLE



BRASS CHAMBER



**EASY
TRANSPORT**



**GUARANTEED
QUALITY**



1800W HIGH PRESSURE WASHER **150BAR**
POWER PRO LINE MAX PRESSURE

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

HIGH PRESSURE WASHER BT 1800 HPW

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 2000 WATTS
MAXIMUM PRESSURE : 160 BAR
FLOW : 12 LPM
WEIGHT : 34 KG
RPM : 2800

FEATURES

100% COPPER WIRE
SELF SUCTION
INDUCTION MOTOR TYPE
BRASS CHAMBER
AUTO STOP
COMPACT DESIGN
HEAVY DUTY SPARE PARTS
EASY MOVEABLE TROLLEY
EASY REPAIRABLE



EASY
TRANSPORT



GUARANTEED
QUALITY



2200W HIGH PRESSURE WASHER **160BAR**
POWER PRO LINE MAX PRESSURE

ISO 9001:2015

CERTIFIED COMPANY



BTALI®

HIGH PRESSURE WASHER BT 2200 HPW

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 3000 WATTS
MAXIMUM PRESSURE : 180 BAR
FLOW : 12 LPM
WEIGHT : 48 KG
RPM : 1440

FEATURES

- 100% COPPER WIRE
- SELF SUCTION
- INDUCTION MOTOR TYPE
- BRASS CHAMBER
- AUTO STOP
- COMPACT DESIGN
- HEAVY DUTY SPARE PARTS
- EASY MOVEABLE TROLLEY
- EASY REPAIRABLE



EASY
TRANSPORT



GUARANTEED
QUALITY



3000W POWER	HIGH PRESSURE WASHER PRO LINE	180BAR MAX PRESSURE
-----------------------	--	-------------------------------

ISO 9001:2015

CERTIFIED COMPANY



BTALI[®]

HIGH PRESSURE WASHER BT2300 HPW

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 3500 WATTS
MAXIMUM PRESSURE : 220 BAR
FLOW : 16 LPM
SPEED : 1440 RPM
WEIGHT : 50 KG

FEATURES

- 100% COPPER WIRE
- SELF SUCTION
- INDUCTION MOTOR TYPE
- BRASS CHAMBER
- AUTO STOP
- COMPACT DESIGN
- HEAVY DUTY SPARE PARTS
- EASY MOVEABLE TROLLEY
- EASY REPAIRABLE



EASY
TRANSPORT



GUARANTEED
QUALITY



3500W POWER	HIGH PRESSURE WASHER PRO LINE	220BAR MAX PRESSURE
-----------------------	--	-------------------------------

ISO 9001:2015

CERTIFIED COMPANY



BTALI®

HIGH PRESSURE WASHER BT 2500 HPW

VOLTAGE / FREQUENCY

440V/50HZ

Specifications

POWER : 4000 WATTS
MAXIMUM PRESSURE : 230 BAR
FLOW : 15 LPM
WEIGHT : 45KG
RPM : 1450

FEATURES

THREE PHASE
100% COPPER WIRE
SELF SUCTION
INDUCTION MOTOR TYPE
BRASS CHAMBER
AUTO STOP
COMPACT DESIGN
HEAVY DUTY SPARE PARTS
EASY MOVEABLE TROLLEY
EASY REPAIRABLE



EASY
TRANSPORT



GUARANTEED
QUALITY



4000W POWER	HIGH PRESSURE WASHER PRO LINE	230BAR MAX PRESSURE
-----------------------	--	-------------------------------

ISO 9001:2015

CERTIFIED COMPANY



POWER
SPRAYER

B TALI[®]

AGRICULTURAL POWER SPRAYER BT 22 ASP

VOLTAGE / FREQUENCY 220V/50HZ

Specifications

PLUNGER NO/DIA/STROKE : 3X22X16MM
PRESSURE : 10-40 KG/CM2
MOTOR 1HP-2HP
SUCTION VOLUME 30-40 L/MIN
SPEED : 800-1400 RPM
WEIGHT : 8.5 KG

FEATURES

REMOVES STUBBORN DIRT UNDER
TOUGH WORKING CONDITIONS
RESULTS IN EFFICIENT CLEANING
SUITABLE FOR LARGE SPRAYING
OPERATIONS
FITTED WITH STAINLESS STEEL VALVES



EASY
TRANSPORT



GUARANTEED
QUALITY




22MM

POWER SPRAYER
PRO LINE

3PISTON

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

AGRICULTURAL POWER SPRAYER BT 30 ASP

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

PLUNGER NO/DIA/STROKE : 3X30X20MM
PRESSURE : 10-40 KG/CM²
MOTOR : 2HP-3HP
SUCTION VOLUME : 60-70 L/MIN
SPEED : 800-1400 RPM
WEIGHT : 11 KG

FEATURES

REMOVES STUBBORN DIRT UNDER
TOUGH WORKING CONDITIONS
RESULTS IN EFFICIENT CLEANING
SUITABLE FOR LARGE SPRAYING
OPERATIONS
FITTED WITH STAINLESS STEEL VALVES



**EASY
TRANSPORT**



**GUARANTEED
QUALITY**



30MM

**POWER SPRAYER
PRO LINE**

3PISTON

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

FOAM TANK

BT 80FT

STAINLESS STEEL
SUS 304

VOLTAGE / FREQUENCY
220V/50HZ

Specifications

MAXIMUM PRESSURE : 0.35MPA
TANK CAPACITY: 80 L
POWER SOURCE : ELECTRIC
WEIGHT : 13 KG

FEATURES

STAINLESS STEEL GRADE 304
EASY MOVEABLE
COMPACT DESIGN
HEAVY DUTY QUALITY



EASY
TRANSPORT



GUARANTEED
QUALITY



0.35
MAX
PRESSURE

FOAM TANK
PRO LINE

80 L
TANK CAPACITY

ISO 9001:2015

CERTIFIED COMPANY



B TALI®

WET & DRY

VACUUM CLEANER

BT 25 WDVC

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

- POWER : 1600 WATTS
- CAPACITY : 25 LTRS
- AIR FLOW : 53L/S
- VACUUM SUCTION : 200MBAR

FEATURES

- HIGH PERFORMANCE OUTPUT
- EXTREMELY HIGH CAPACITY
- EASILY PORTABLE
- SUCTION FUNCTION
- MULTIPLE ACCESSORIES



EASY
TRANSPORT



GUARANTEED
QUALITY



1600W WET & DRY VACUUM CLEANER **25L**
 POWER PRO LINE

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

WET & DRY

VACUUM CLEANER

BT 35 WDVC

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 1800 WATTS
CAPACITY : 35 LTRS
AIR FLOW : 53L/S
VACUUM SUCTION : 200MBAR

FEATURES

HIGH PERFORMANCE OUTPUT
EXTREMELY HIGH CAPACITY
EASILY PORTABLE
SUCTION FUNCTION
MULTIPLE ACCESSORIES



EASY
TRANSPORT



GUARANTEED
QUALITY



1800W WET & DRY VACUUM CLEANER
POWER PRO LINE **35L**

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

WET & DRY

VACUUM CLEANER

BT 60 WDVC

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 2000 WATTS
CAPACITY : 60 LTRS
VACUUM SUCTION : 220 MBAR

FEATURES

2 MOTOR OPERATION
HIGH PERFORMANCE OUTPUT
EXTREMELY HIGH CAPACITY
EASILY PORTABLE
SUCTION FUNCTION
MULTIPLE ACCESSORIES



EASY
TRANSPORT



GUARANTEED
QUALITY



2000W WET & DRY VACUUM CLEANER **60 L**
POWER PRO LINE

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

WET & DRY

VACUUM CLEANER

BT 80 WDVC

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 5400 WATTS
CAPACITY : 80 LTRS
AIR FLOW : 150 L/S
VACUUM SUCTION : 250 MBAR

FEATURES

3 MOTOR OPERATION
HIGH PERFORMANCE OUTPUT
COMMERCIAL USE
EASILY PORTABLE
SUCTION FUNCTION
MULTIPLE ACCESSORIES



EASY
TRANSPORT



GUARANTEED
QUALITY



5400W WET & DRY VACUUM CLEANER
POWER PRO LINE **80L**

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

AIR COMPRESSOR BT 24 MAC

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 2HP / 1.5 KW
TANK CAPACITY : 24 L
PRESSURE : 8 BAR / 115 PSI
FLOW : 198 L/MIN
SPEED : 2850 RPM

FEATURES

OIL TYPE
EASY STORAGE
HIGH SPEED
COMPACT DESIGN
EASY MOVABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



2hp POWER	AIR COMPRESSOR PRO LINE	24L
--------------	----------------------------	-----

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

AIR COMPRESSOR BT 50 MAC

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 3HP / 2.2 KW
TANK CAPACITY : 50 L
PRESSURE : 8 BAR / 115 PSI
FLOW : 250L/MIN
SPEED : 2850 RPM

FEATURES

OIL TYPE
EASY STORAGE
HIGH SPEED
COMPACT DESIGN
EASY MOVABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



3hp POWER	AIR COMPRESSOR PRO LINE	50L
--------------	----------------------------	-----

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

AIR COMPRESSOR BT 24 ESMAC

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 2HP / 1.5 KW
TANK CAPACITY : 24 L
PRESSURE : 8 BAR / 115 PSI
FLOW : 155 L/MIN
SPEED : 1440 RPM

FEATURES

OIL TYPE
EASY STORAGE
HIGH SPEED
COMPACT DESIGN
EASY MOVABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



2hp
POWER

AIR COMPRESSOR
PRO LINE

24L

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

AIR COMPRESSOR BT 50 ESMAC

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 3HP / 2.2 KW
TANK CAPACITY : 50 L
PRESSURE : 8 BAR / 115 PSI
FLOW : 222 L/MIN
SPEED : 1440 RPM

FEATURES

OIL TYPE
EASY STORAGE
HIGH SPEED
COMPACT DESIGN
EASY MOVABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



3hp POWER AIR COMPRESSOR PRO LINE 50L

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

AIR COMPRESSOR BT 50 T MAC

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 5HP / 3.7 KW
TANK CAPACITY : 50 L
PRESSURE : 8 BAR / 115 PSI
FLOW : 420 L/MIN
SPEED : 2850 RPM

FEATURES

OIL TYPE
EASY STORAGE
LOW NOISE
COMPACT DESIGN
EASY MOVABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



5hp POWER	AIR COMPRESSOR PRO LINE	50L
--------------	----------------------------	-----

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

AIR COMPRESSOR BT 9 OFAC

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 1HP / 0.75 KW
TANK CAPACITY : 9 L
PRESSURE : 8 BAR / 115 PSI
FLOW : 106 L/MIN
SPEED : 1400 RPM

FEATURES

OIL FREE TYPE
EASY STORAGE
LOW NOISE
COMPACT DESIGN
EASY MOVABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



1hp POWER	AIR COMPRESSOR PRO LINE	9L
--------------	----------------------------	----

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

AIR COMPRESSOR BT 25 OFAC

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 1HP / 0.75 KW
TANK CAPACITY : 25 L
PRESSURE : 8 BAR / 115 PSI
FLOW : 106 L/MIN
SPEED : 1400 RPM

FEATURES

OIL FREE TYPE
EASY STORAGE
LOW NOISE
COMPACT DESIGN
EASY MOVABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



1hp POWER	AIR COMPRESSOR PRO LINE	25L
--------------	----------------------------	-----

ISO 9001:2015

CERTIFIED COMPANY



BTALI[®]

AIR COMPRESSOR BT 50 OFAC

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 1HP / 0.75 KW
TANK CAPACITY : 50 L
PRESSURE : 8 BAR / 115 PSI
FLOW : 106 L/MIN
SPEED : 1400 RPM

FEATURES

OIL FREE TYPE
EASY STORAGE
LOW NOISE
COMPACT DESIGN
EASY MOVABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



1hp POWER	AIR COMPRESSOR PRO LINE	50L
--------------	----------------------------	-----

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

AIR COMPRESSOR BT 50 T OFAC

VOLTAGE / FREQUENCY


220V/50HZ

Specifications

POWER : 2HP / 1.5 KW
TANK CAPACITY : 50 L
PRESSURE : 8 BAR / 115 PSI
FLOW : 212 L/MIN
SPEED : 1400 RPM

FEATURES

OIL FREE TYPE
EASY STORAGE
LOW NOISE
COMPACT DESIGN
EASY MOVABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



2hp POWER	AIR COMPRESSOR PRO LINE	50L
--------------	----------------------------	-----

ISO 9001:2015

CERTIFIED COMPANY



BTALI®

AIR COMPRESSOR BT 60 OFAC

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 3HP / 2.2 KW
TANK CAPACITY : 60 L
PRESSURE : 8 BAR / 115 PSI
FLOW : 318 L/MIN
SPEED : 1400 RPM

FEATURES

OIL FREE TYPE
EASY STORAGE
LOW NOISE
COMPACT DESIGN
EASY MOVABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



3hp POWER AIR COMPRESSOR PRO LINE 60L

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

AIR COMPRESSOR

BT 550 OFACB

VOLTAGE / FREQUENCY


220V/50HZ

Specifications

POWER : 1HP / 0.75 KW
PRESSURE : 8 BAR / 115 PSI
FLOW : 106 L/MIN
SPEED : 1400 RPM

FEATURES

OIL FREE TYPE
EASY STORAGE
LOW NOISE
COMPACT DESIGN
EASY MOVABLE

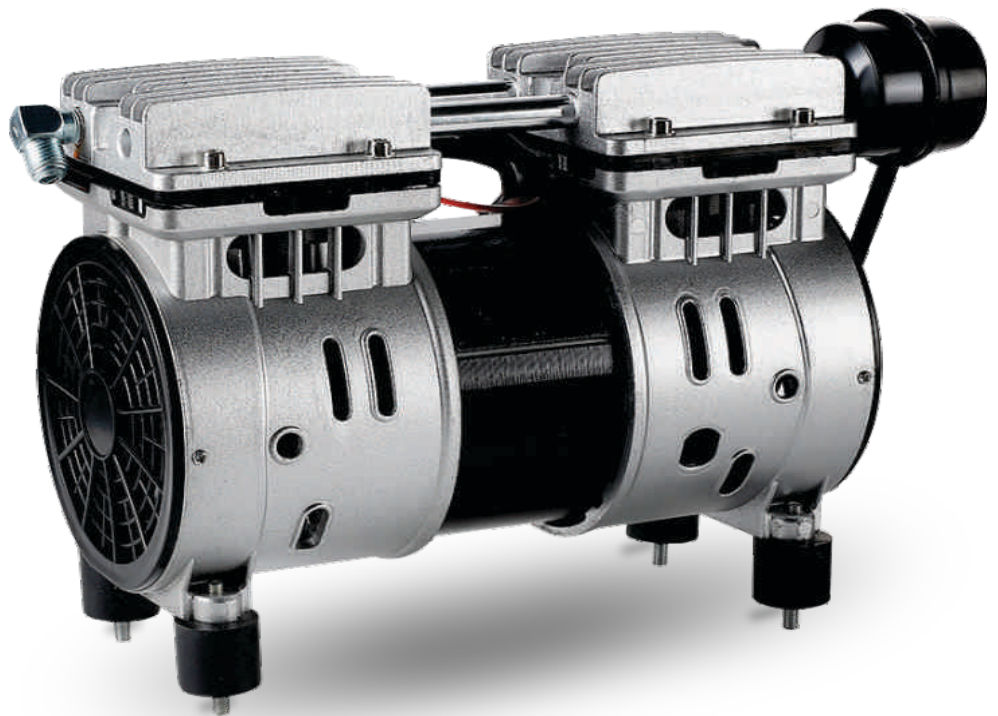

EASY
TRANSPORT



GUARANTEED
QUALITY



1hp
POWER

AIR PUMP
PRO LINE

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

AIR COMPRESSOR

BT 750 OFACB

VOLTAGE / FREQUENCY



220V/50HZ

Specifications

POWER : 1.5 HP / 1.1 KW
PRESSURE : 8 BAR / 115 PSI
FLOW : 120 L/MIN
SPEED : 1400 RPM

FEATURES

OIL FREE TYPE
EASY STORAGE
LOW NOISE
COMPACT DESIGN
EASY MOVABLE

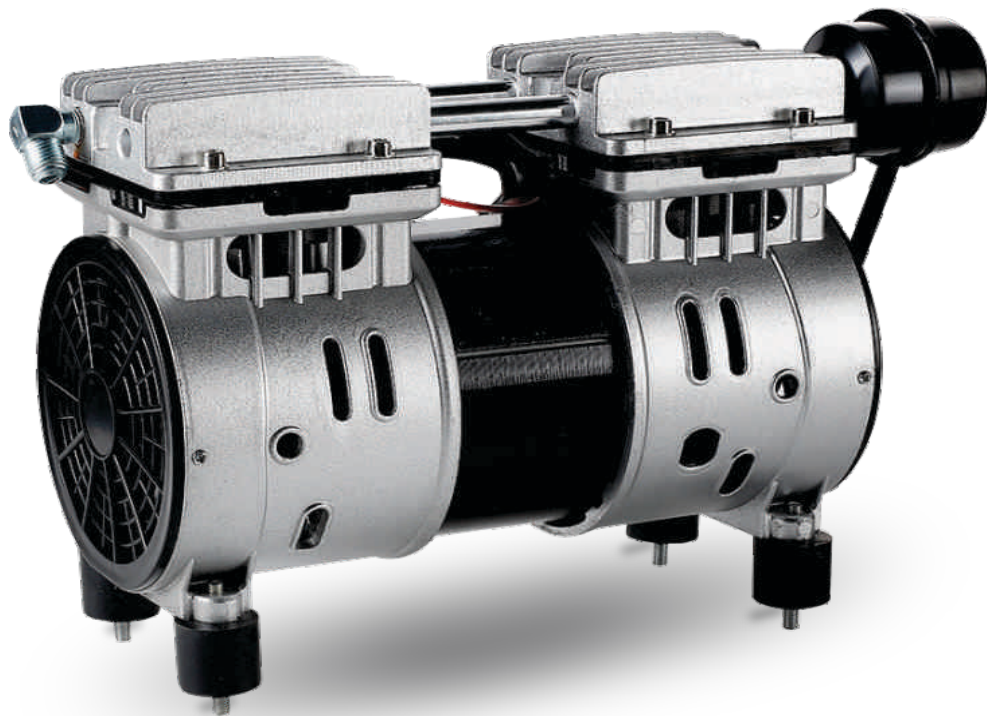

EASY
TRANSPORT



GUARANTEED
QUALITY



1.5hp
POWER

AIR PUMP
PRO LINE

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

AIR COMPRESSOR BT 1300 OFACB

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 2 HP / 1.5 KW
PRESSURE : 8 BAR / 115 PSI
FLOW : 391 L/MIN
SPEED : 1440 RPM

FEATURES

OIL FREE TYPE
EASY STORAGE
HIGH SPEED
COMPACT DESIGN
EASY MOVABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



2hp
POWER

AIR PUMP
PRO LINE

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

AIR COMPRESSOR BT 30 RTOFAC

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 1 HP/0.75 KW
TANK CAPACITY : 30 L
PRESSURE : 8 BAR/115 PSI
FLOW : 106 L/MIN
SPEED : 1440RPM

FEATURES

OIL FREE TYPE
EASY STORAGE
HIGH SPEED
COMPACT DESIGN
EASY MOVEABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



1hp
POWER

AIR COMPRESSOR
PRO LINE

30L

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

AIR COMPRESSOR BT 40 RTOFAC

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 1.5 HP/1.1 KW
TANK CAPACITY : 40 L
PRESSURE : 8 BAR/115 PSI
FLOW : 106 L/MIN
SPEED : 1440RPM

FEATURES

OIL FREE TYPE
EASY STORAGE
HIGH SPEED
COMPACT DESIGN
EASY MOVEABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



1.5hp
POWER

AIR COMPRESSOR
PRO LINE

40L

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

AIR COMPRESSOR BT 9 OFACHS 1100

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 1.5HP / 1.1KW
TANK CAPACITY : 9L
PRESSURE : 8BAR/115 PSI
FLOW : 167 L/MIN
SPEED : 2850 RPM
NOISE LEVEL : 74DBA
AIR FILLING TIME : 45 SEC

FEATURES

OIL FREE TYPE
EASY STORAGE
HIGH SPEED
COMPACT DESIGN
EASY MOVEABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



1.5hp POWER	AIR COMPRESSOR HIGH SPEED	9L
----------------	------------------------------	----

ISO 9001:2015

CERTIFIED COMPANY



BTALI®

AIR COMPRESSOR BT 15 OFACHS 1400

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 2.0HP / 1.5KW
TANK CAPACITY: 15L
PRESSURE : 8BAR/115 PSI
FLOW : 254 L/MIN
SPEED: 2850 RPM
NOISE LEVEL : 79DBA
AIR FILLING TIME : 25 SEC

FEATURES

OIL FREE TYPE
EASY STORAGE
HIGH SPEED
COMPACT DESIGN
EASY MOVEABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



2.0hp AIR COMPRESSOR 15L
POWER HIGH SPEED

ISO 9001:2015

CERTIFIED COMPANY



BTALI®

AIR COMPRESSOR BT 25 OFACHS 1100

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 1.5HP /1.1KW
TANK CAPACITY : 25L
PRESSURE : 8BAR/115PSI
FLOW : 167L/MIN
SPEED : 2850 RPM
NOISE LEVEL : 74 DBA
AIR FILLING TIME : 110 SEC

FEATURES

OIL FREE TYPE
EASY STORAGE
HIGH SPEED
COMPACT DESIGN
EASY MOVEABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



1.5hp AIR COMPRESSOR 25L
POWER HIGH SPEED

ISO 9001:2015

CERTIFIED COMPANY



BTALI®

AIR COMPRESSOR

BT 25 OFACHS 1400

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 2.0HP /1.5KW
TANK CAPACITY : 25L
PRESSURE : 8BAR/115PSI
FLOW : 254L/MIN
SPEED : 2850 RPM
NOISE LEVEL : 79 DBA
AIR FILLING TIME : 70 SEC

FEATURES

OIL FREE TYPE
EASY STORAGE
HIGH SPEED
COMPACT DESIGN
EASY MOVEABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



2.0hp AIR COMPRESSOR 25L
POWER HIGH SPEED

ISO 9001:2015

CERTIFIED COMPANY



BTALI®

AIR COMPRESSOR

BT 50 OFACHS 1100

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 1.5HP /1.1KW
TANK CAPACITY : 50L
PRESSURE : 8BAR/115PSI
FLOW : 167L/MIN
SPEED : 2850 RPM
NOISE LEVEL : 74 DBA
AIR FILLING TIME : 220 SEC

FEATURES

OIL FREE TYPE
EASY STORAGE
HIGH SPEED
COMPACT DESIGN
EASY MOVEABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



1.5hp
POWER

AIR COMPRESSOR
HIGH SPEED

50L

ISO 9001:2015

CERTIFIED COMPANY



BTALI®

AIR COMPRESSOR

BT 50 OFACHS 1400

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 2.0HP /1.5KW
TANK CAPACITY : 50L
PRESSURE : 8BAR/115PSI
FLOW : 254L/MIN
SPEED : 2850 RPM
AIR FILLING TIME : 140 SEC
NOISE LEVEL : 79 DBA

FEATURES

OIL FREE TYPE
EASY STORAGE
HIGH SPEED
COMPACT DESIGN
EASY MOVEABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



2.0hp AIR COMPRESSOR 50L
POWER HIGH SPEED

ISO 9001:2015

CERTIFIED COMPANY



BTALI®

AIR COMPRESSOR

BT 50T OFACHS 1100

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 3HP /2.2KW
TANK CAPACITY : 50L
PRESSURE : 8BAR/115PSI
FLOW : 334L/MIN
SPEED : 2850 RPM
NOISE LEVEL : 77 DBA

FEATURES

OIL FREE TYPE
EASY STORAGE
HIGH SPEED
COMPACT DESIGN
EASY MOVEABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



3.0hp AIR COMPRESSOR **50L**
POWER HIGH SPEED

ISO 9001:2015

CERTIFIED COMPANY



BTALI®

AIR COMPRESSOR

BT 50T OFACHS 1400

VOLTAGE / FREQUENCY


220V/50HZ

Specifications

POWER : 4.0HP /3KW
TANK CAPACITY : 50L
PRESSURE : 8BAR/115PSI
FLOW : 508L/MIN
SPEED : 2850 RPM
NOISE LEVEL : 82 DBA

FEATURES

OIL FREE TYPE
EASY STORAGE
HIGH SPEED
COMPACT DESIGN
EASY MOVEABLE
AUTO STOP FUNCTION

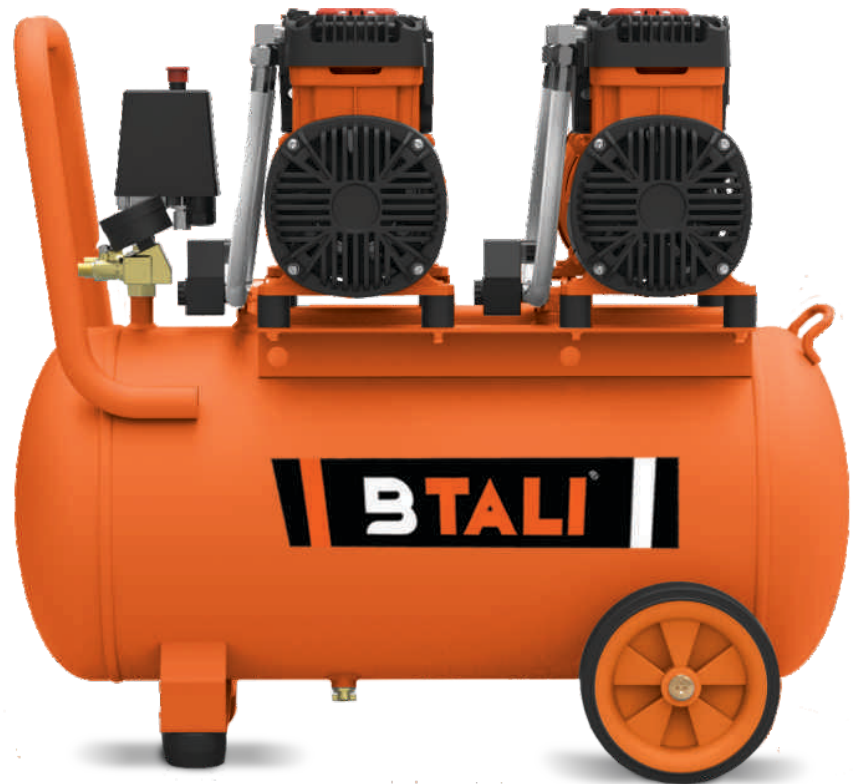

EASY
TRANSPORT



GUARANTEED
QUALITY



4.0hp AIR COMPRESSOR 50L
POWER HIGH SPEED

ISO 9001:2015

CERTIFIED COMPANY



BTALI[®]

AIR COMPRESSOR BT 60 OFACHS 1100

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 4.5HP /3.3KW
TANK CAPACITY : 60L
PRESSURE : 8BAR/115PSI
FLOW : 501L/MIN
SPEED : 2850 RPM
NOISE LEVEL : 77 DBA

FEATURES

OIL FREE TYPE
EASY STORAGE
HIGH SPEED
COMPACT DESIGN
EASY MOVEABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



4.5hp AIR COMPRESSOR 60L
POWER HIGH SPEED

ISO 9001:2015

CERTIFIED COMPANY



BTALI[®]

AIR COMPRESSOR BT 60 OFACHS 1400

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 6HP /4.5KW
TANK CAPACITY : 60L
PRESSURE : 8BAR/115PSI
SPEED : 2850 RPM
FLOW : 762L/MIN
NOISE LEVEL : 82 DBA

FEATURES

OIL FREE TYPE
EASY STORAGE
HIGH SPEED
COMPACT DESIGN
EASY MOVEABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



6.0hp AIR COMPRESSOR 60L
POWER HIGH SPEED

ISO 9001:2015

CERTIFIED COMPANY



BTALI[®]

AIR COMPRESSOR BT 100 OFACHS 1400

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 5HP /4.2KW
TANK CAPACITY : 100L
PRESSURE : 8BAR/115PSI
FLOW : 762L/MIN
SPEED : 2850 RPM
NOISE LEVEL : 85 DBA

FEATURES

OIL FREE TYPE
EASY STORAGE
HIGH SPEED
COMPACT DESIGN
EASY MOVEABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



5hp
POWER

AIR COMPRESSOR
HIGH SPEED

100L

ISO 9001:2015

CERTIFIED COMPANY



BTALI®

AIR COMPRESSOR

BT 180 OFACHS 1400

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 6 HP / 5.6KW
TANK CAPACITY : 180L
PRESSURE : 8 BAR / 115 PSI
FLOW : 1016 L/MIN
SPEED : 2850 RPM
NOISE LEVEL : 85 DBA

FEATURES

OIL FREE TYPE
EASY STORAGE
HIGH SPEED
COMPACT DESIGN
EASY MOVEABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



6.0hp AIR COMPRESSOR 180L
POWER HIGH SPEED

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

AIR COMPRESSOR

BT 1100 OFACHSB

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER: 1.5 HP / 1.1 KW
PRESSURE: 8 BAR / 115 PSI
FLOW: 167 L/MIN
SPEED : 2850 RPM

FEATURES

OIL FREE TYPE
EASY STORAGE
HIGH SPEED
COMPACT DESIGN
EASY MOVEABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



1.5hp
POWER

AIR PUMP
PRO LINE

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

AIR COMPRESSOR

BT 1400 OFACHSB

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER: 2.0 HP / 1.5 KW
PRESSURE: 8 BAR / 115 PSI
FLOW : 254 L/MIN
SPEED : 2850 RPM

FEATURES

OIL FREE TYPE
EASY STORAGE
HIGH SPEED
COMPACT DESIGN
EASY MOVEABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY



2hp
POWER

AIR PUMP
PRO LINE


ISO 9001:2015

CERTIFIED COMPANY

The logo features a stylized 'B' in black and 'TALI' in orange, with a registered trademark symbol. To the left of the text are two parallel diagonal lines, one black and one grey, pointing towards the top right.

BTALI[®]

AUTOMATIC
PUMP & ACCESSORIES



BTALI®

AUTOMATIC PUMP CONTROL BT 10 APC

VOLTAGE / FREQUENCY 220V/50HZ

Specifications

STANDARD CUT-IN PRESSURE 1.2/1.5/2.2 BAR
MAX RATED CURRENT 10A
MAX PRESSURE 10 bar
MAX POWER 1.1KW

FEATURES

DRY RUNNING PROTECTION WITH
AUTOMATIC RESET
DESIGNED FOR HIGH START/STOP
PER HOUR
BUILT IN THERMAL PROTECTION
EASY TO INSTALL AND SILENT
RUNNING
LOW MAINTAINANCE ,EXTENDED
PUMP LIFE
EASY REPAIR



EASY
TRANSPORT



GUARANTEED
QUALITY



1.1 kw POWER PUMP CONTROL PRO LINE 10Bar

ISO 9001:2015
CERTIFIED COMPANY



BTALI®

AUTOMATIC PUMP CONTROL BT 13 APC

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

STANDARD CUT-IN PRESSURE	1.2/1.5/2.2 BAR
MAX RATED CURRENT	10A
MAX PRESSURE	10 bar
MAX POWER	1.1KW

FEATURES

- DRY RUNNING PROTECTION WITH AUTOMATIC RESET
- DESIGNED FOR HIGH START/STOP PER HOUR
- BUILT IN THERMAL PROTECTION
- EASY TO INSTALL AND SILENT RUNNING
- LOW MAINTAINANCE ,EXTENDED PUMP LIFE
- EASY REPAIR



**EASY
TRANSPORT**




**GUARANTEED
QUALITY**



1.1 kw POWER	PUMP CONTROL PRO LINE	10Bar
-------------------------	----------------------------------	--------------

ISO 9001:2015

CERTIFIED COMPANY

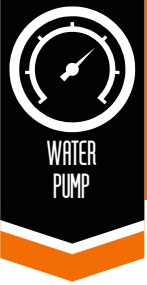

B TALI[®]

AUTOMATIC WATER PUMP BT 25 SPAP

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

MAX POWER : 0.25 HP
MAX HEAD : 28M
MAX FLOW : 30L/MIN
OUTLET DIAMETER : 25MM
WEIGHT : 5.6 KG

FEATURES

COPPER WIRE INDUCTION MOTOR
DELAY START
WATER STOP, PUMP STOP
FLOW CONTROL
MACHINE LOCK PROTECTION
OVER LOAD PROTECTION



EASY
TRANSPORT




GUARANTEED
QUALITY



0.25hp POWER WATER PUMP PRO LINE 28M

ISO 9001:2015

CERTIFIED COMPANY

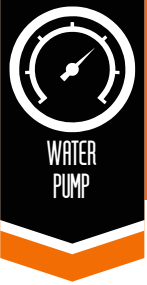

B TALI[®]

SELF PRIMING AUTOMATIC PUMP BT 50 SPAP

VOLTAGE / FREQUENCY
220V/50HZ

Specifications

MAX POWER : 0.5 HP
MAX HEAD : 25 M
MAX CURRENT : 2.5 A
MAX FLOW : 33 L/MIN
OUTLET DIAMETER : 25MM
WEIGHT : 9 KG

FEATURES

COPPER WIRE INDUCTION MOTOR
DELAY START
WATER STOP, PUMP STOP
FLOW CONTROL
MACHINE LOCK PROTECTION
OVER LOAD PROTECTION



EASY
TRANSPORT



GUARANTEED
QUALITY




0.5 hp
POWER

WATER PUMP
PRO LINE

25M

ISO 9001:2015

CERTIFIED COMPANY



BTALI[®]

SELF PRIMING AUTOMATIC PUMP BT 100 SPAP

VOLTAGE / FREQUENCY 220V/50HZ

Specifications

MAX POWER : 1 HP
MAX HEAD : 55 M
MAX CURRENT : 4.2 A
MAX FLOW : 58 L/MIN
OUTLET DIAMETER : 25MM
WEIGHT : 14 KG

FEATURES

COPPER WIRE INDUCTION MOTOR
DELAY START
WATER STOP, PUMP STOP
FLOW CONTROL
MACHINE LOCK PROTECTION
OVER LOAD PROTECTION



EASY
TRANSPORT



GUARANTEED
QUALITY



1hp
POWER

WATER PUMP
PRO LINE

55M

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

HOT & COLD AUTOMATIC BOOSTING PUMP BT 10 ABP

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

MAX POWER : 90 W
MAX HEAD : 10 M
MAX CAPACITY : 20L/MIN

FEATURES

AUTOMATIC
SILENT
NO LEAKAGE
COMPACT DESIGN
SPACE SAVING
SUITABLE FOR 100 C
HOT WATER
EASY REPAIR



EASY
TRANSPORT



GUARANTEED
QUALITY




90 W
POWER

AUTOMATIC PUMP
PRO LINE

10M

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

CIRCULATOR & BOOSTER PUMP BT 20 ABP

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

MAX POWER : 100 W
CONNECTION SIZE : 20 MM/3/4"
SPEED : 2280
MAX HEAD : 9 M
MAX CAPACITY : 23L/MIN
G.W. : 4.0 KG

FEATURES

ENAMEL COATING
AUTOMATIC
SILENT
NO LEAKAGE
COMPACT DESIGN
SPACE SAVING



EASY
TRANSPORT



GUARANTEED
QUALITY




100 W
POWER

CIRCULATOR PUMP
PRO LINE

9M

ISO 9001:2015

CERTIFIED COMPANY



BTALI®

CIRCULATOR & BOOSTER PUMP BT 20 ABP-N

VOLTAGE / FREQUENCY
220V/50HZ

Specifications

MAX POWER : 100 W
CONNECTION SIZE : 20 MM/3/4"
SPEED : 2280
MAX HEAD : 9 M
MAX CAPACITY : 23L/MIN
G.W. : 4.0 KG

FEATURES

AUTOMATIC
SILENT
NO LEAKAGE
COMPACT DESIGN
SPACE SAVING



EASY
TRANSPORT



GUARANTEED
QUALITY



100 W
POWER

CIRCULATOR PUMP
PRO LINE

9M

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

PRESSURE TANK

BT 24 LVPT

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

CONNECTOR	1" STAINLESS STEEL INLET THREAD
MEMBRANE	FIXED BUTYL RUBBER MEMBRANE EXPANSION TYPE
MAX PRESSURE	10 BAR/ 150 PSI
PRE-CHARGE PRESSURE	1.5 BAR
WORKING TEMPRATURE	20 DEGREE C/+99 DEGREE C

FEATURES

NO MAINTENANCE
LEAK FREE, ORING SEALED , AIR VALVE CAP
COMPREHENSIVE TESTING
SINGLE DIAPHARM DESIGN
PATENTED STAINLESS STEEL WATER CONNECTION (3MM THICKNESS)
FIXED MEMBRANE
BUTYL DIAPHARM



EASY
TRANSPORT



GUARANTEED
QUALITY



24Ltr

PRESSURE TANK
PRO LINE

10Bar

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

PRESSURE TANK

BT 60 LVPT

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

CONNECTOR	1" STAINLESS STEEL INLET THREAD
MEMBRANE	FIXED BUTYL RUBBER MEMBRANE REPLACEABLE TYPE
FLANGE	STAINLESS STEEL
MAX PRESSURE	10 BAR/ 150 PSI
PRE-CHARGE PRESSURE	1.5 BAR
WORKING TEMPRATURE	20 DEGREE C/+99 DEGREE C

FEATURES

NO MAINTENANCE
LEAK FREE, ORING SEALED , AIR VALVE CAP
COMPREHENSIVE TESTING
SINGLE DIAPHARM DESIGN
3MM THICKNESS STAINLESS STEEL WATER CONNECTION
PATENTED STAINLESS STEEL WATER CONNECTION
REPLACEABLE MEMBRANE
BUTYL DIAPHARM



**EASY
TRANSPORT**



**GUARANTEED
QUALITY**



60Ltr

PRESSURE TANK
PRO LINE

10Bar

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

PRESSURE TANK

BT 80 LVPT

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

CONNECTOR	1" STAINLESS STEEL INLET THREAD
MEMBRANE	FIXED BUTYL RUBBER MEMBRANE REPLACEABLE TYPE
FLANGE	STAINLESS STEEL
MAX PRESSURE	10 BAR/ 150 PSI
PRE-CHARGE PRESSURE	1.5 BAR
WORKING TEMPERATURE	20 DEGREE C/+99 DEGREE C

FEATURES

- NO MAINTENANCE
- LEAK FREE, ORING SEALED , AIR VALVE CAP
- COMPREHENSIVE TESTING
- SINGLE DIAPHRAM DESIGN
- 3MM THICKNESS STAINLESS STEEL WATER CONNECTION
- PATENTED STAINLESS STEEL WATER CONNECTION
- REPLACEABLE MEMBRANE
- BUTYL DIAPHRAM



EASY
TRANSPORT



GUARANTEED
QUALITY



80Ltr

PRESSURE TANK
PRO LINE

10Bar

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

PRESSURE TANK

BT 100 LVPT

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

CONNECTOR	1" STAINLESS STEEL INLET THREAD
MEMBRANE	FIXED BUTYL RUBBER MEMBRANE REPLACEABLE TYPE
FLANGE	STAINLESS STEEL
MAX PRESSURE	10 BAR/ 150 PSI
PRE-CHARGE PRESSURE	1.5 BAR
WORKING TEMPRATURE	20 DEGREE C/+99 DEGREE C

FEATURES

NO MAINTENANCE
LEAK FREE, ORING SEALED, AIR VALVE CAP
COMPREHENSIVE TESTING
SINGLE DIAPHARM DESIGN
3MM THICKNESS STAINLESS STEEL WATER CONNECTION
PATENTED STAINLESS STEEL WATER CONNECTION
REPLACEABLE MEMBRANE
BUTYL DIAPHARM



EASY
TRANSPORT



GUARANTEED
QUALITY




100Ltr

PRESSURE TANK
PRO LINE

10Bar

ISO 9001:2015

CERTIFIED COMPANY

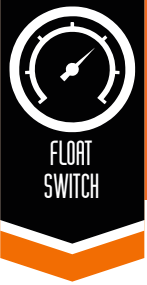

B TALI[®]

FLOAT SWITCH BT6FS2M

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

MAX CURRENT	AC 16(4)A
MAX USING TEMPERATURE	55 DEGREE C
PROTECTION DEGREE	IP68

FEATURES

FLOAT SWITCH IS USED TO DETECT THE LEVEL OF LIQUID WITHIN TANK THE SWITCH MAY BE USED IN A PUMP, AN INDICATOR, AN ALARM ,OR OTHER DEVICES



PVC CABLE



EASY
TRANSPORT



GUARANTEED
QUALITY



ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

FLOAT SWITCH BT6 FS3M

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

MAX CURRENT	AC 16(4)A
MAX USING TEMPERATURE	55 DEGREE C
PROTECTION DEGREE	IP68

FEATURES

FLOAT SWITCH IS USED TO DETECT THE LEVEL OF LIQUID WITHIN TANK THE SWITCH MAY BE USED IN A PUMP, AN INDICATOR, AN ALARM ,OR OTHER DEVICES



PVC CABLE



EASY
TRANSPORT




GUARANTEED
QUALITY



ISO 9001:2015

CERTIFIED COMPANY

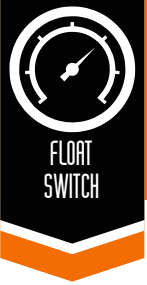

B TALI[®]

FLOAT SWITCH BT 8 FS3M

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

MAX CURRENT	AC 16(4)A
MAX WORKING TEMPERATURE	55 DEGREE C
PROTECTION DEGREE	IP68

FEATURES

FLOAT SWITCH IS USED TO DETECT THE LEVEL OF LIQUID WITHIN TANK THE SWITCH MAY BE USED IN A PUMP, AN INDICATOR, AN ALARM ,OR OTHER DEVICES



RUBBER CABLE



EASY
TRANSPORT



GUARANTEED
QUALITY



ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

PRESSURE SWITCH BT 2 PS

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

PRESSURE RANGE	20 - 100PSI
MAX RATED CURRENT	12A
MAX AMBIENT TEMP	40 DEGREE C
PROTECTION DEGREE	IP20
RATED CURRENT /POWER	12A/2HP , 20A/1.5HP
MAX CUT IN	20 PSI
MAX CUT OUT	100 PSI
GENERAL PRESSURE SETTING	20-40 , 30-50 , 40-60 PSI



FEATURES

DRY RUNNING PROTECTION WITH AUTOMATIC RESET
DESIGNED FOR HIGH START/STOP PER HOUR
BUILT IN THERMAL PROTECTION
EASY TO INSTALL AND SILENT RUNNING
LOW MAINTENANCE, EXTENDED PUMP LIFE
EASY REPAIR



**EASY
TRANSPORT**



**GUARANTEED
QUALITY**



ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

PRESSURE GAUGE

BT 50 PG

SPECIFICATIONS

PRESSURE 0-10 BAR
DIAL SIZE 50 MM
THREAD SIZE 1/4 INCH

FEATURES

THE ACCESSORIES ARE BASICALLY USED FOR PRESSURE TANKS AND PRESSURE PUMPS



EASY
TRANSPORT




GUARANTEED
QUALITY



ISO 9001:2015

CERTIFIED COMPANY

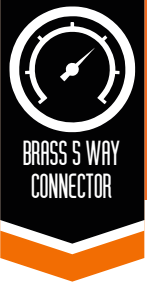

B TALI[®]

BRASS 5WAY CONNECTOR BT 5 WC

SPECIFICATIONS

SIZE 90 MM
WEIGHT 220 G

FEATURES

THE ACCESSORIES ARE BASICALLY USED FOR
PRESSURE TANKS AND PRESSURE PUMPS



EASY
TRANSPORT



GUARANTEED
QUALITY




ISO 9001:2015
CERTIFIED COMPANY

The logo features a stylized 'B' in black and 'TALI' in orange, with a registered trademark symbol. To the left of the text is a graphic element consisting of two parallel diagonal lines, one black and one grey, set against a white background.

BTALI[®]

**SUBMERSIBLE
PUMP**

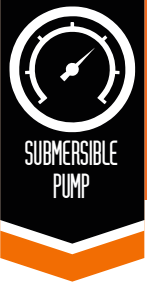

B TALI[®]

SUBMERSIBLE PUMP BT 100 SPPF

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 200 WATT
MAX HEAD : 6 MTR
MAX FLOW : 50 L/MIN
SPEED : 2860 R/MIN
G.W. : 4.3 KG

FEATURES

PLASTIC BODY
DRY RUN PROTECTION
EASY TO HANDLE
SILENT
COMPACT DESIGN
EASY MOVABLE
AUTO STOP FUNCTION



EASY
TRANSPORT




GUARANTEED
QUALITY



0.25hp POWER	SUBMERSIBLE PUMP PRO LINE	25MM
-----------------	------------------------------	------

ISO 9001:2015
CERTIFIED COMPANY



SUBMERSIBLE
PUMP

BTALI[®]

SUBMERSIBLE PUMP BT 250 SPF

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 375 WATT
MAX HEAD : 7.5 MTR
MAX FLOW : 150 L/MIN
SPEED : 2860 R/MIN
G.W. : 9.5 KG

FEATURES

DRY RUN PROTECTION
EASY TO HANDLE
SILENT
COMPACT DESIGN
EASY MOVABLE
AUTO STOP FUNCTION



EASY
TRANSPORT




GUARANTEED
QUALITY



0.5hp POWER	SUBMERSIBLE PUMP PRO LINE	40MM
----------------	------------------------------	------

ISO 9001:2015
CERTIFIED COMPANY



BTALI®

SUBMERSIBLE PUMP BT 750 SPF

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 750 WATT
MAX HEAD : 10 MTR
MAX FLOW : 300 L/MIN
SPEED : 2860 R/MIN
G.W. : 22 KG

FEATURES

DRY RUN PROTECTION
EASY TO HANDLE
SILENT
COMPACT DESIGN
EASY MOVABLE
AUTO STOP FUNCTION



EASY
TRANSPORT




GUARANTEED
QUALITY



1hp POWER	SUBMERSIBLE PUMP PRO LINE	50MM
--------------	------------------------------	------

ISO 9001:2015

CERTIFIED COMPANY



BTALI[®]

SUBMERSIBLE PUMP BT 1100 SPF

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 1100 WATT
MAX HEAD : 10 MTR
MAX FLOW : 350 L/MIN
SPEED : 2860 R/MIN
G.W. : 24 KG

FEATURES

DRY RUN PROTECTION
EASY TO HANDLE
SILENT
COMPACT DESIGN
EASY MOVABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY




1.5hp
POWER

SUBMERSIBLE PUMP
PRO LINE

50MM

ISO 9001:2015

CERTIFIED COMPANY

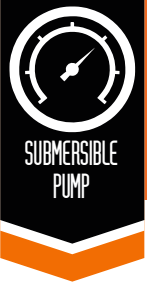

BTALI®

SUBMERSIBLE PUMP BT 1300 SPCF

VOLTAGE / FREQUENCY


220V/50HZ

Specifications

POWER : 1300 WATT
MAX HEAD : 12 MTR
MAX FLOW : 300 L/MIN
SPEED : 2860 R/MIN
G.W. : 25 KG

FEATURES

CUTTER BLADE TYPE
DRY RUN PROTECTION
EASY TO HANDLE
SILENT
COMPACT DESIGN
EASY MOVABLE
AUTO STOP FUNCTION

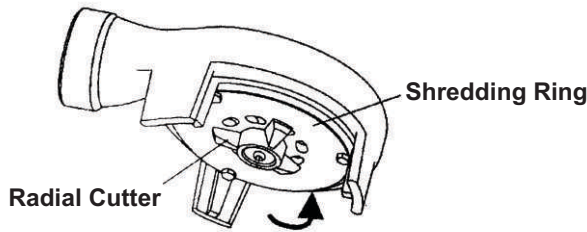

EASY
TRANSPORT




GUARANTEED
QUALITY



2hp POWER	SUBMERSIBLE PUMP PRO LINE	50MM
--------------	------------------------------	------

ISO 9001:2015
CERTIFIED COMPANY



BTALI®

SUBMERSIBLE PUMP BT 1500 SPF

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 1500 WATT
MAX HEAD : 22 MTR
MAX FLOW : 350 L/MIN
SPEED : 2860 R/MIN
G.W. : 26.5 KG

FEATURES

DRY RUN PROTECTION
EASY TO HANDLE
SILENT
COMPACT DESIGN
EASY MOVABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY




2hp
POWER

SUBMERSIBLE PUMP
PRO LINE

50MM

ISO 9001:2015

CERTIFIED COMPANY

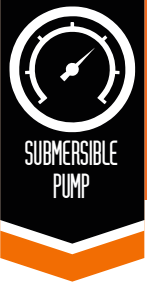

B TALI[®]

SUBMERSIBLE PUMP BT 2200 SPF

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 2200 WATT
MAX HEAD : 18 MTR
MAX FLOW : 750 L/MIN
SPEED : 2860 R/MIN
G.W. : 33 KG

FEATURES

STAINLESS STEEL
DRY RUN PROTECTION
EASY TO HANDLE
SILENT
COMPACT DESIGN
EASY MOVABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY




3hp
POWER

SUBMERSIBLE PUMP
PRO LINE

80MM

ISO 9001:2015

CERTIFIED COMPANY



SUBMERSIBLE
PUMP

BTALI[®]

SUBMERSIBLE PUMP BT 700 SSPF

VOLTAGE / FREQUENCY


220V/50HZ

Specifications

POWER : 700 WATT
MAX HEAD : 10 MTR
MAX FLOW : 380 L/MIN
SPEED : 2860 R/MIN
G.W. : 18.5 KG

FEATURES

STAINLESS STEEL
DRY RUN PROTECTION
EASY TO HANDLE
SILENT
COMPACT DESIGN
EASY MOVABLE
AUTO STOP FUNCTION



EASY
TRANSPORT



GUARANTEED
QUALITY




1hp
POWER

SUBMERSIBLE PUMP
PRO LINE

50MM

ISO 9001:2015

CERTIFIED COMPANY

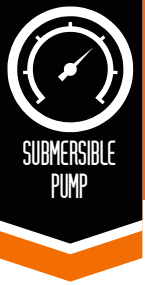

SUBMERSIBLE
PUMP

B TALI[®]

SUBMERSIBLE PUMP BT 1500 SSPF

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

POWER : 1500 WATT
MAX HEAD : 15 MTR
MAX FLOW : 450 L/MIN
SPEED : 2860 R/MIN
G.W. : 23 KG

FEATURES

STAINLESS STEEL
DRY RUN PROTECTION
EASY TO HANDLE
SILENT
COMPACT DESIGN
EASY MOVABLE
AUTO STOP FUNCTION



EASY
TRANSPORT




GUARANTEED
QUALITY



B TALI	
BT 1500 SSPF	
SUBMERSIBLE PUMP	
Please connect the Electricity Working Circuit Breaker before using to keep safe.	
Output: 1500W	Electric Source: 220V/50Hz
Max flow: 450L/min	Phase: Single
Max head: 15m	Insulation: B
Speed: 2860r/min	Discharge: 2"

2hp POWER SUBMERSIBLE PUMP PRO LINE 50MM

ISO 9001:2015
CERTIFIED COMPANY

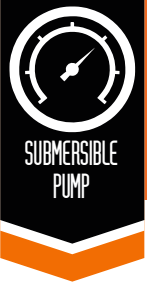

B TALI[®]

SUBMERSIBLE PUMP BT 31.5 SSP

VOLTAGE / FREQUENCY

220V/50HZ

Specifications

MAX POWER : 2.2 (K.W)/3.0 (HP)

MAX FLOW : 666 (L/MIN)

MAX HEAD : 14.5 (M)

OUTLET DIAMETER : 80 (MM)

G.W. 37 (KG)

FEATURES

COMPACT DESIGN
HIGH PERFORMANCE & EXCEPTIONAL
DURABILITY FOR HANDLING ABRASIVE LIQUID
PUMPS CASING DOUBLE DESIGN
STAINLESS STEEL /CAST IRON.
DYNAMICALLY BALANCED HIGH
CHROME STEEL IMPELLER
DOUBLE MECHANICAL SEAL IN OIL BATH.
FINE CASTING DISCHARGE & TOP COVER
HERMETICALLY SEALED MOTOR
EQUIPPED BUILD IN THERMAL PROTECTION
STAINLESS STEEL MOTOR SHAFT
PROTECTED BY SLEEVE AGAINST
DIRECT WEAR



**EASY
TRANSPORT**




**GUARANTEED
QUALITY**



3hp POWER **SUBMERSIBLE PUMP** **80MM**
PRO LINE

ISO 9001:2015

CERTIFIED COMPANY

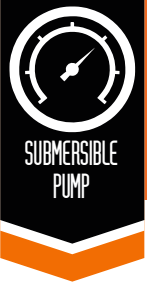

B TALI[®]

SUBMERSIBLE PUMP BT 31.5 TSSP

VOLTAGE / FREQUENCY

440V/50HZ

Specifications

MAX POWER : 2.2 (K.W)/3.0 (HP)

MAX FLOW : 666 (L/MIN)

MAX HEAD : 14.5 (M)

OUTLET DIAMETER : 80 (MM)

G.W. 37 (KG)

FEATURES

- COMPACT DESIGN
- HIGH PERFORMANCE & EXCEPTIONAL DURABILITY FOR HANDLING ABRASIVE LIQUID
- PUMPS CASING DOUBLE DESIGN
- STAINLESS STEEL /CAST IRON.
- DYNAMICALLY BALANCED HIGH CHROME STEEL IMPELLER
- DOUBLE MECHANICAL SEAL IN OIL BATH.
- FINE CASTING DISCHARGE & TOP COVER
- HERMETICALLY SEALED MOTOR
- EQUIPPED BUILD IN THERMAL PROTECTION
- STAINLESS STEEL MOTOR SHAFT
- PROTECTED BY SLEEVE AGAINST DIRECT WEAR



**EASY
TRANSPORT**



**GUARANTEED
QUALITY**




**3hp
POWER**

**SUBMERSIBLE PUMP
PRO LINE**

80MM

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

SUBMERSIBLE PUMP BT 32.2 TSSP

VOLTAGE / FREQUENCY

440V/50HZ

Specifications

MAX POWER : 3.7 (K.W)/5.0 (HP)

MAX FLOW : 833 (L/MIN)


MAX HEAD : 21 (M)

OUTLET DIAMETER : 80 (MM)

G.W. 40 (KG)

FEATURES

COMPACT DESIGN
HIGH PERFORMANCE & EXCEPTIONAL
DURABILITY FOR HANDLING ABRASIVE LIQUID
PUMPS CASING DOUBLE DESIGN
STAINLESS STEEL /CAST IRON.
DYNAMICALLY BALANCED HIGH
CHROME STEEL IMPELLER
DOUBLE MECHANICAL SEAL IN OIL BATH.
FINE CASTING DISCHARGE & TOP COVER
HERMETICALLY SEALED MOTOR
EQUIPPED BUILD IN THERMAL PROTECTION
STAINLESS STEEL MOTOR SHAFT
PROTECTED BY SLEEVE AGAINST
DIRECT WEAR



**EASY
TRANSPORT**



**GUARANTEED
QUALITY**




**5hp
POWER**

**SUBMERSIBLE PUMP
PRO LINE**

80MM

ISO 9001:2015

CERTIFIED COMPANY

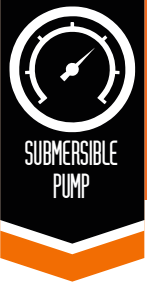

B TALI[®]

SUBMERSIBLE PUMP BT 43.7 TSSP

VOLTAGE / FREQUENCY

440V/50HZ

Specifications

MAX POWER : 5,6 (K.W)/7.5 (HP)

MAX FLOW : 1500 (L/MIN)

MAX HEAD : 18 (M)

OUTLET DIAMETER : 100 (MM)

G.W. 59 (KG)

FEATURES

COMPACT DESIGN
HIGH PERFORMANCE & EXCEPTIONAL
DURABILITY FOR HANDLING ABRASIVE LIQUID
PUMPS CASING DOUBLE DESIGN
STAINLESS STEEL /CAST IRON.
DYNAMICALLY BALANCED HIGH
CHROME STEEL IMPELLER
DOUBLE MECHANICAL SEAL IN OIL BATH.
FINE CASTING DISCHARGE & TOP COVER
HERMETICALLY SEALED MOTOR
EQUIPPED BUILD IN THERMAL PROTECTION
STAINLESS STEEL MOTOR SHAFT
PROTECTED BY SLEEVE AGAINST
DIRECT WEAR



**EASY
TRANSPORT**



**GUARANTEED
QUALITY**




**7.5hp
POWER**

**SUBMERSIBLE PUMP
PRO LINE**

100MM

ISO 9001:2015

CERTIFIED COMPANY



B TALI[®]

SUBMERSIBLE PUMP BT 45.5 TSSP

VOLTAGE / FREQUENCY

440V/50HZ

Specifications

MAX POWER : 7.5 (K.W)/10 (HP)

MAX FLOW : 1750 (L/MIN)

MAX HEAD : 23 (M)

OUTLET DIAMETER : 100 (MM)

G.W. 67 (KG)

FEATURES

COMPACT DESIGN
HIGH PERFORMANCE & EXCEPTIONAL
DURABILITY FOR HANDLING ABRASIVE LIQUID
PUMPS CASING DOUBLE DESIGN
STAINLESS STEEL /CAST IRON.
DYNAMICALLY BALANCED HIGH
CHROME STEEL IMPELLER
DOUBLE MECHANICAL SEAL IN OIL BATH.
FINE CASTING DISCHARGE & TOP COVER
HERMETICALLY SEALED MOTOR
EQUIPPED BUILD IN THERMAL PROTECTION
STAINLESS STEEL MOTOR SHAFT
PROTECTED BY SLEEVE AGAINST
DIRECT WEAR



**EASY
TRANSPORT**




**GUARANTEED
QUALITY**



10hp SUBMERSIBLE PUMP **100MM**
POWER PRO LINE

ISO 9001:2015

CERTIFIED COMPANY

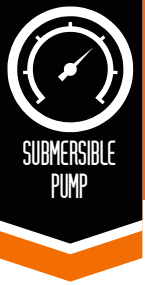

B TALI[®]

SUBMERSIBLE PUMP BT 67.5 TSSP

VOLTAGE / FREQUENCY

440V/50HZ

Specifications

MAX POWER : 7.5 (K.W)/10 (HP)

MAX FLOW : 2167 (L/MIN)

MAX HEAD : 32 (M)

OUTLET DIAMETER : 150 (MM)

G.W. 110 (KG)

FEATURES

COMPACT DESIGN
HIGH PERFORMANCE & EXCEPTIONAL
DURABILITY FOR HANDLING ABRASIVE LIQUID
PUMPS CASING DOUBLE DESIGN
STAINLESS STEEL /CAST IRON.
DYNAMICALLY BALANCED HIGH
CHROME STEEL IMPELLER
DOUBLE MECHANICAL SEAL IN OIL BATH.
FINE CASTING DISCHARGE & TOP COVER
HERMETICALLY SEALED MOTOR
EQUIPPED BUILD IN THERMAL PROTECTION
STAINLESS STEEL MOTOR SHAFT
PROTECTED BY SLEEVE AGAINST
DIRECT WEAR



**EASY
TRANSPORT**



**GUARANTEED
QUALITY**




10hp
POWER

**SUBMERSIBLE PUMP
PRO LINE**

150MM

ISO 9001:2015

CERTIFIED COMPANY

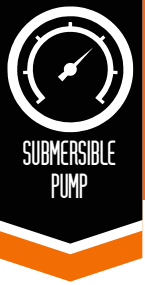

B TALI[®]

SUBMERSIBLE PUMP BT 611 TSSP

VOLTAGE / FREQUENCY

440V/50HZ

Specifications

MAX POWER : 11 (K.W)/15 (HP)

MAX FLOW : 2500 (L/MIN)

MAX HEAD : 34 (M)

OUTLET DIAMETER : 150 (MM)

G.W. 125 (KG)

FEATURES

COMPACT DESIGN
HIGH PERFORMANCE & EXCEPTIONAL
DURABILITY FOR HANDLING ABRASIVE LIQUID
PUMPS CASING DOUBLE DESIGN
STAINLESS STEEL /CAST IRON.
DYNAMICALLY BALANCED HIGH
CHROME STEEL IMPELLER
DOUBLE MECHANICAL SEAL IN OIL BATH.
FINE CASTING DISCHARGE & TOP COVER
HERMETICALLY SEALED MOTOR
EQUIPPED BUILD IN THERMAL PROTECTION
STAINLESS STEEL MOTOR SHAFT
PROTECTED BY SLEEVE AGAINST
DIRECT WEAR



**EASY
TRANSPORT**



**GUARANTEED
QUALITY**



15hp
POWER

**SUBMERSIBLE PUMP
PRO LINE**

150MM

ISO 9001:2015

CERTIFIED COMPANY

BTALI[®] INTERNATIONAL

Authorised Dealer / Distributor



www.btaliinternational.com
info@btaliinternational.com